



Combics Food Complete Scale stainless steel




- AISI 304, stainless steel (Platform optional: AISI 316 Ti stainless steel electro polished)
- 4 display and control Units, type of protection IP67
- Platforms with type of protection IP68 + IP69K
- 3 platform dimensions
- 6 weighing ranges from 3 kg to 150 kg
- Overload protection
- Temperature range $-10^{\circ}\text{C} \dots +40^{\circ}\text{C}$
- 2 verifiable versions, accuracy class III, resolution 3.000 e and 2 x 3.000 e
- 2 versions non verifiable, resolution 15.000 d, 30.000 d

Technical data:

Maximum Readability:	30.000d
Accuracy:	Class III
Number of verif. intervals:	3.000e, 2 x 3.000e
Additional interfaces:	optional
Power supply:	100-240 V/AC
DC power supply:	optional, 15,5-24V/DC
AC power supply:	optional, 13-17V/AC
Temperature range:	$-10^{\circ}\text{C} \dots +40^{\circ}\text{C}$
Electrical safety:	EN61010-1, EN60950
	IEC1010-1, IEC950
Display and control unit:	remoted, optional with column for connecting to platform

Material:	AISI 304, stainless steel
Ingress Protection Rate:	IP 67 (Load cell IP 69K + IP68)
Weighing system	Stainless Single Point load cell C 3
Load plate:	AISI 304, stainless steel, optional AISI 316 Ti stainless steel
Others:	4 adjustable feet Level indicator Overload protection
Battery operation:	optional, via external, rechargeable battery pack
Limitation of emission:	EN61326+A1 Cl. B, (IEC61326+A1)
Defined immunity to interference:	EN61326+A1 Ind. (IEC61326+A1)

Display and Control Unit:

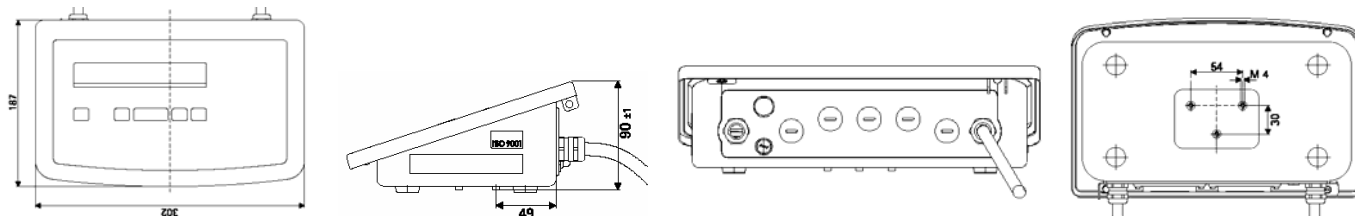

Platforms:

a	b	c	d	e	Design:
(mm)	(mm)	(mm)	(mm)	(mm)	
320	240	72...90	264	184	...DC -
400	300	94...109	344	244	...ED -
500	400	97...112	443	343	...FE -

Display and Control Unit (Part 1)

CW1FS	Interfaces:	RS232	Display:	20 mm LCD, backlit
CW1FNS	Interfaces:	RS232 Barcode Reader	Display:	20 mm LCD, backlit
			Others:	numeric keypad
CW2FS	Interfaces:	RS232 Barcode Reader	Display:	20 mm LCD, backlit
			Others:	integrated red-green-yellow-LED's for checkweighing
CW3FS	Interfaces:	RS232 RS485/RS422/RS232 Barcode Reader	Display:	108 x 58 mm graphic display
			Others:	integrated red-green-yellow-LED's for checkweighing

Platform (Part 2)

Order no.	Weighing capacity in kg	Readability in g				Material S: Stainless steel		Length platform cable in m
		non verifiable		verificable		Load plate	Base frame	
		- L	- I	-LCE	-NCE			
1-3DC	3	0,2	0,1	1	0,5 / 1	S	S	3
1-6DC	6	0,5	0,2	2	1 / 2	S	S	3
1-15DC	15	1	0,5	5	2 / 5	S	S	3
1-30ED	30	2	1	10	5 / 10	S	S	3
1-30FE	30	2	1	10	5 / 10	S	S	3
1-60ED	60	5	2	20	10 / 20	S	S	3
1-60FE	60	5	2	20	10 / 20	S	S	3
1-150FE	150	10	5	50	20 / 50	S	S	3

Resolution (depends on the readability of the scale)

- NCE	2 x 3.000 e, verification scale intervals
- LCE	3.000 e, verification scale intervals
- I	30.000 d, scale intervals (digits)
- L	15.000 d, scale intervals (digits)

Example-Order number CW1FS1-60FE-L:

Part 1:	CW1FS	Display and Control Unit:	Application: only weighing
Part 2:	1-60FE	Platform:	60kg, L=500 mm x B = 400 mm
	-L	Resolution:	5g readability, non-verifiable